

Instant Broadband™ Series

ADSL Wall-Mount Phone Filter


HPNA Compatible



Features:

- Isolates Your Telephone Voice Service From ADSL Service and/or Home PhoneLine Network
- Attenuates ADSL and/or HPNA Signals to Prevent Conversion into Voice Band Signals
- Minimizes Voice Band Interference
- Compatible with G.lite, G.dmt, V.90 and Metallic Loop Testing
- FCC CFR 47 Part 68; UL 1950, CE and CSA 22.2 #950-5 compliant and listed
- One Year Limited Warranty

The ADSL Wall-Mount Phone Filter is designed for phones, fax machines, and answering machines. All you need is one ADSL Wall-Mount Phone Filter to support any analog phone, fax machine, or answering machine.

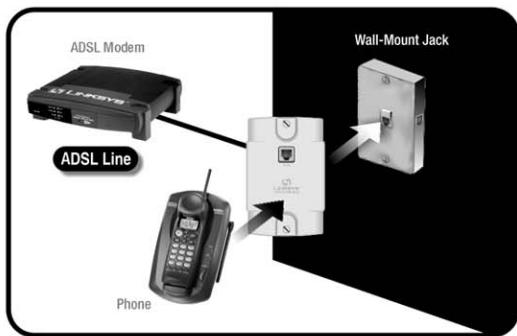

Instructions:

1. Power off your ADSL modem and any devices connected to it.
2. Plug in the RJ-11 telephone connector into the wall mount jack. Place the Filter's mounting holes over the wall plate's screws, and then push down on the Filter to secure its position.
3. Connect your ADSL modem and/or HomePNA device to the **Line** port on the side of the Wall-Mount Filter. Connect your telephone to the **Phone** port on the front.
4. Turn on your ADSL modem and any other attached devices.

Note: Not Compatible With PBX phone systems. This Filter should only be used with existing wall-mount phone jack plates.